


Thermal Aerolam Bubble Insulations




Aerolam Premium/Premium PE

Roll Size (W X L)	Bubble Size	Reflection Ratio	Temp. Range
1.2m X 40m	4mm x 10 mm Total Thk (mm) 8 mm	97% Thermal Resistance Emissivity 0.03-0.04	-122 F to 230 F (-50°C to 110 °C)
Application: Roof/Wall/Cabinet/Packaging			

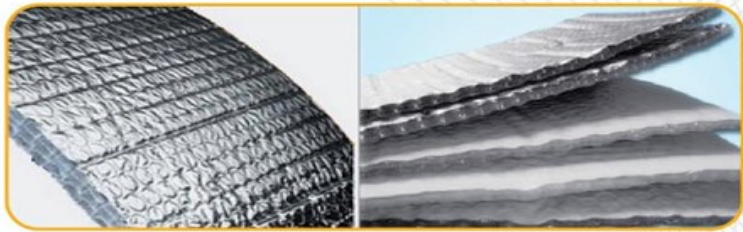


Aerolam METPET/METPET PE

Roll Size (W X L)	Bubble Size	Reflection Ratio	Temp. Range
1.2m X 40m	4mm x 10 mm Total Thk (mm) 8 mm	97% Thermal Resistance Emissivity 0.03-0.04	-122 F to 230 F (-50°C to 110 °C)

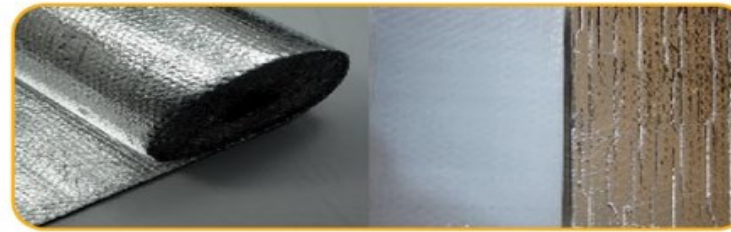

Aerolam Super/Super PE

Roll Size (W X L)	Bubble Size	Reflection Ratio	Temp. Range
1.2m X 40m	4mm x 10 mm Total Thk (mm) 4.5 to 5 mm	95% Thermal Resistance Emissivity 0.04-0.05	-122 F to 230 F (-50°C to 110 °C)
Application: Roof/Wall/Cabinet/Packaging			

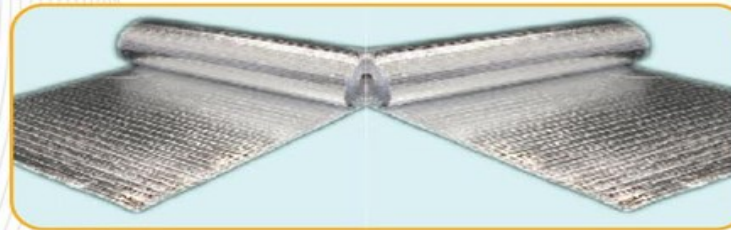

AEROLAM ALUMET

Roll Size (W X L)	Bubble Size	Reflection Ratio	Temp. Range
1.2m X 40m	4mm x 10 mm Total Thk (mm) 8 mm	97% Thermal Resistance Emissivity 0.03-0.04	-122 F to 230 F (-50°C to 110°C)